

high performance inductive PD sensors

HFCT 39mm

Techimp High Frequency Current Transformer 39mm Clamp is an inductive sensor for Partial Discharge detection. It is suitable for on/off line PD tests on many electrical systems such as cables, transformers, rotating machine, etc...

The main advantage of the HFCT 39mm Clamp is the easy installation on the ground connection of the electrical system under test without the need of disconnecting it.

A coaxial BNC connector is available to connect the HFCT 39mm Clamp to any Techimp PD acquisition unit by means of a 50Ω coaxial cable.

The arrow on the enclosure indicates the polarity of the output voltage (V_{out}) in relation to the input current (I_{in}) direction: when the sensor is installed with the arrow directed to ground, the detected voltage signal (V_{out}) has the same phase as the input current (I_{in}).


Benefits

- Maintenance free
- High sensitivity and reliability
- Robust and easy to use
- Safety

Specifications


Bandwidth
Max Sensitivity (V_{out} / I_{in} @5MHz)
Load Impedance
Hole dimension
Operating temperature

1MHz ÷ 80MHz
19mV/mA
50Ω
Φ 39mm
-20°C +70°C

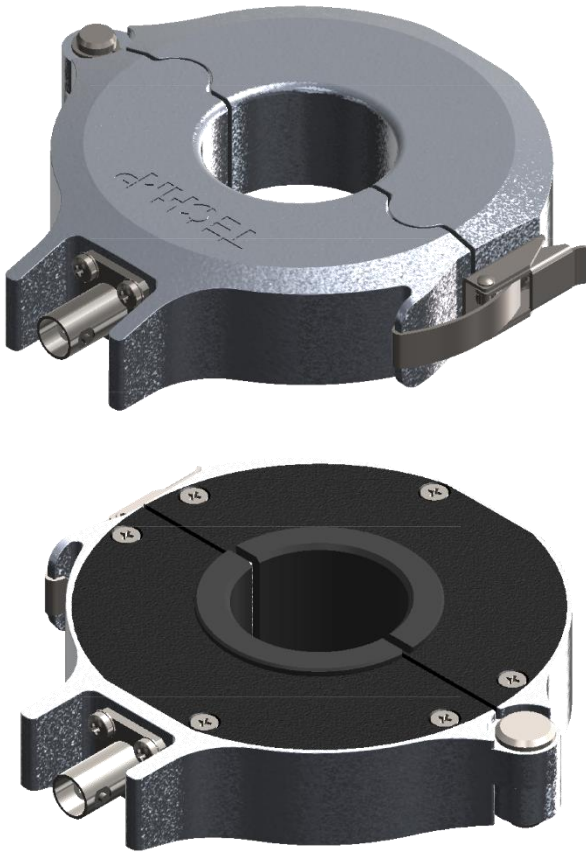


HFCT 39mm

Frequency Response

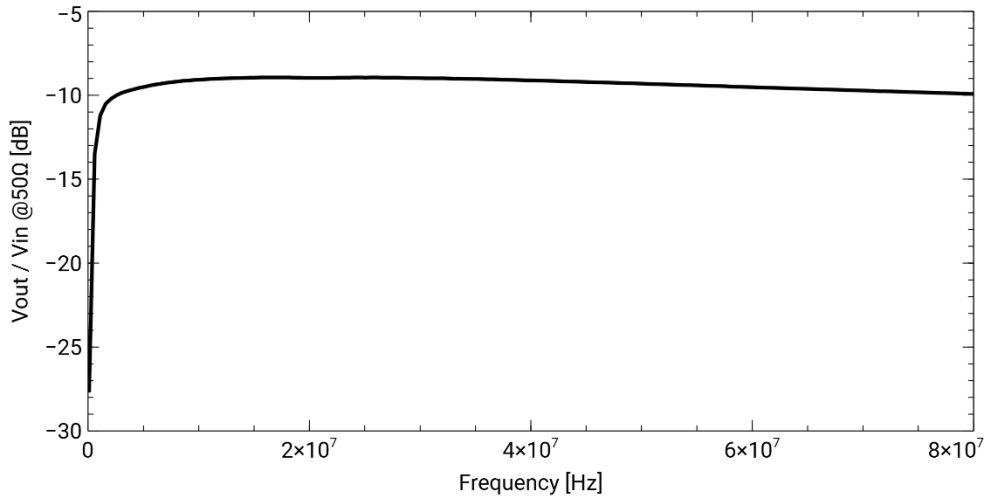

Mechanical Specification

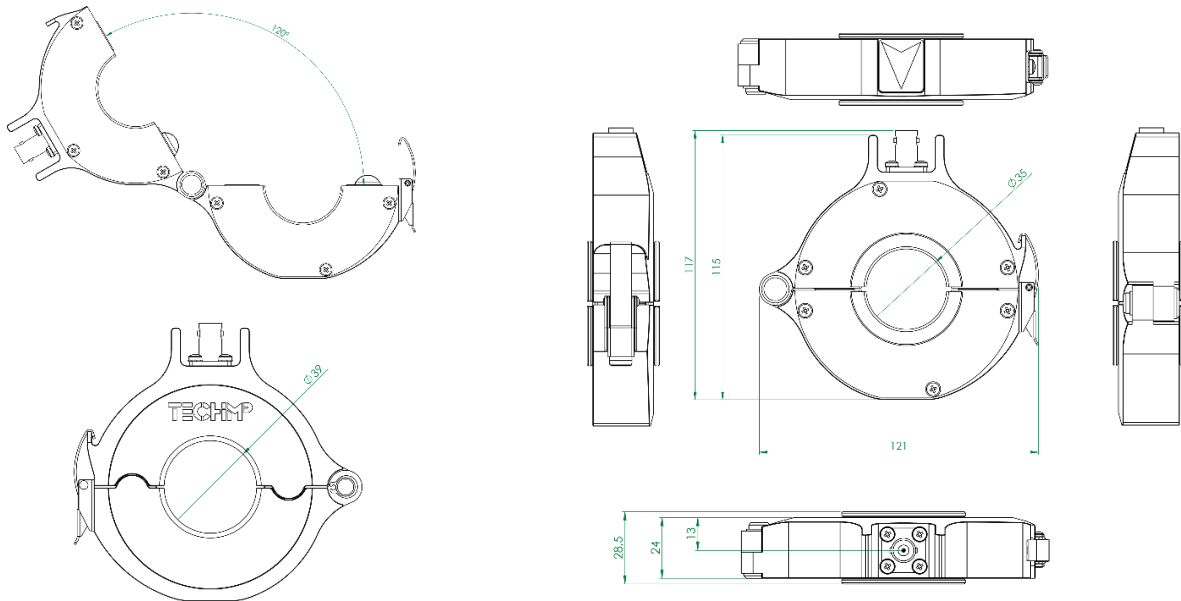

Suitable For

HVAC CABLE	MVAC CABLE	HVDC CABLE	MOTOR	GENERA TOR	PWM VSD	GIS GIL GIB	SWITCH BOARDS	OUTDO OR INSULA TOR	HV TRAF0	MV TRAF0	TA/TV
------------	------------	------------	-------	------------	---------	-------------	---------------	---------------------	----------	----------	-------

Several different sensors are available, fully compatible with Techimp Global Diagnostic platform. They can be freely combined at customer needs provided they can be applied for the specific application.

ALTANOVA
GROUP
www.altanova-group.com

TECHIMP

TECHIMP - ALTANOVA GROUP
Via Toscana 11,
40069 Zola Predosa (Bo) - Italy
T +39 051 199 86 050
Email sales@altanova-group.com

isa

ISA - ALTANOVA GROUP
Via Prati Bassi 22,
21020 Taino (Va) - Italy
T +39 0331 95 60 81
Email sales@altanova-group.com