

2019 nCoV 防疫利器-**體溫快篩**系統(台灣製 CP 值高)

武漢肺炎(2019nCoV)-未來 **病毒防疫工作** 將會變成常態
-您的學校/企業之體溫篩選策略?! 您準備好了嗎?



發燒防疫快篩系統
熱像鏡頭+攝影機
台灣製(CP值高)

美國FLIR熱影像CCD
德州儀器DSP晶片
防水等級:IP66



SI-體溫快篩系統產品說明示意(僅供參考)

SI-體溫快篩系統方案內容

- ★ 雙鏡頭熱影像攝影機 x1 只
- ★ 體溫快篩軟體(前台版)x1 套
- ★ 監錄主機 H8240STx1 台
- ★ 顯示幕(19吋以上)x1 台
- ★ 攝影機三腳架 x1 只



註:溫馨提醒於 109 年 2 月 7 日以前下單可以保證於同年 2 月 25 日以前架設完畢

雙鏡頭熱影像體溫快篩系統

Thermal Intelligent Temperature Monitoring Solution


Dual Eyes Front Edge Thermal Camera

SNT-8D0120F	
2M Dual Eye s Thermal IP Cube Camera	
<ul style="list-style-type: none"> • Dual Sensor IP camera • Visible Image for Video 2M pixels Hi-resolution • Detecting Environment Temperature • High Temperature Alarm I/O (CGI Support) • Temperature Risk Management • Motion Detection • Support 12Vdc PoE • White LEDs 	

H.265/H.264 5M Hybrid DVR (AHD / TVI / CVI / CVBS / IP) 5M | 4M | 1080P

Name	SAVR-H8204ST-AHL1 (4CH)	SAVR-H8208ST-AHL1 (8CH)	SAVR-H8216ST-AHL2 (16CH)
Video input	Analog HD x 4 Ch + 2Ch IP or 6Ch IP	Analog HD x 8 Ch + 4Ch IP or 12Ch IP	Analog HD x 16 Ch + 8Ch IP or 24Ch IP
Display	Analog: 5MP(20fps) / 4MP / 3MP(30fps) / 1080P / 720P / 960H IP: 5MP/4MP/3MP/1080P/720P		
Record	Analog: 5MP:12fps(each ch) / 4MP:15fps(each ch) / 3MP: 20fps(each ch) 1080P: PAL:25fps(each ch) / NTSC:30fps(each ch) IP: PAL:25fps(each ch) / NTSC: 30fps(each ch)	Analog: 5MP:13fps(each ch) / 4MP:17fps(each ch) / 3MP:23fps(each ch) 1080P: PAL:25fps(each ch) / NTSC:30fps(each ch) IP: PAL:25fps(each ch)/NTSC: 30fps(each ch)	
Sync. Playback	4Ch	8Ch	16Ch
Multiplex Operation	Live Display, Backup and Newwork		
HDD Interface	1 SATA HDD up to 8TB	2 SATA HDD up to 16TB	2 SATA HDD up to 16TB
Alarm I/O	4Ch Input / 1Ch Output	8Ch Input / 1Ch Output	16 Ch Input / 1Ch Output
VGA/HDMI	1024 x 768, 1280x720, 1280x1024, 1440x900, 1920x1080, 2560x1440 (2K), 3840x2160 (4K)		

Thermal, IP, Coaxial HD Hybrid System

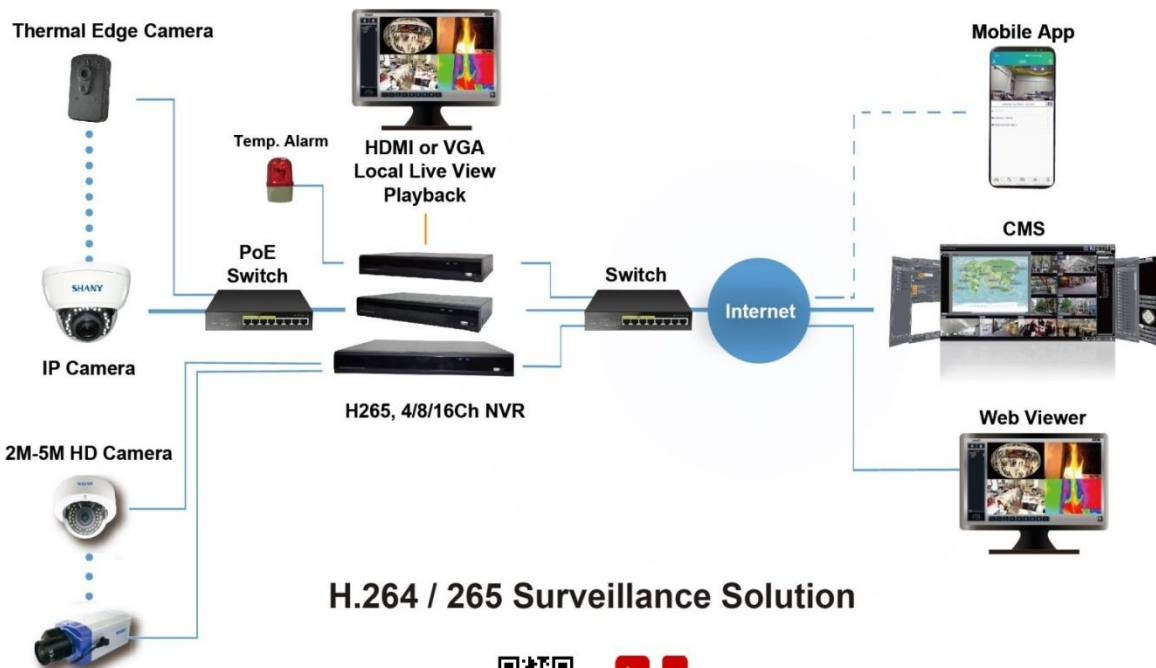

H.264 / 265 Surveillance Solution

